

530,049

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number  
WO 2004/032384 A1

(51) International Patent Classification?: H04B 10/17,  
H01S 3/30

211-8588 (JP). TERAHARA, Takafumi [JP/JP]; c/o  
FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Naka-  
hara-ku, Kawasaki-shi, Kanagawa 211-8588 (JP).

(21) International Application Number:  
PCT/JP2002/010375

(74) Agent: OSUGA, Yoshlyuki; 3rd Fl., Nibancho Bldg.,  
8-20, Nibancho, Chiyoda-ku, Tokyo 102-0084 (JP).

(22) International Filing Date: 4 October 2002 (04.10.2002)

(25) Filing Language: English

(81) Designated States (national): CN, JP, US.

(26) Publication Language: English

(84) Designated States (regional): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT,  
LU, MC, NL, PT, SE, SK, TR).

(71) Applicant (for all designated States except US): FUJITSU  
LIMITED [JP/JP]; 1-1, Kamikodanaka 4-chome, Naka-  
hara-ku, Kawasaki-shi, Kanagawa 211-8588 (JP).

Published:  
— with international search report

(72) Inventors; and


(75) Inventors/Applicants (for US only): HAINBERGER,  
Rainer [AT/JP]; c/o FUJITSU LIMITED, 1-1, Kamiko-  
danaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.



WO 2004/032384 A1

(54) Title: RAMAN AMPLIFICATION SYSTEM UTILIZING MODULATED SECOND-ORDER RAMAN PUMPING

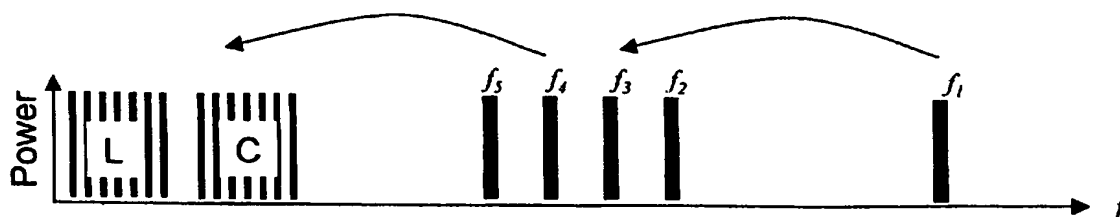

(57) Abstract: Higher-order Raman pumping is combined with pump modulation in a Raman amplified optical communication system. First- and second-order Raman pumps are both modulated and launched in opposite direction to signals in an optical fiber. Relative timing of the pumps is controlled to optimize lateral signal power distribution along the fiber.

## DESCRIPTION

RAMAN AMPLIFICATION SYSTEM UTILIZING MODULATED  
SECOND-ORDER RAMAN PUMPING

5

## Technical Field

The present invention relates to a Raman amplified optical communication system utilizing higher-order Raman amplification with modulated Raman pumps.

10

## Background Art

State-of-the-art wavelength division multiplexed (WDM) optical fiber transmission systems employ distributed Raman amplification (DRA) in addition to discrete amplifiers. DRA partly compensates fiber losses along the transmission fiber and thus allows increasing the distance between discrete amplifiers. DRA is based on stimulated Raman scattering, an inelastic scattering process between photons and optical phonons in which optical power is transferred from shorter to longer wavelengths.

Fig. 1 shows a typical Raman gain profile (Raman gain spectrum). The maximum power transfer occurs between wavelengths separated by 13.3 THz (about 100 nm). Two pumping arrangements can be distinguished, as shown in

25

Fig. 2 and Fig. 3.

Fig. 2 shows counter-directional pumping, where the pump light 112 propagates in opposite direction to the signal light (signal waves) 111 in a transmission fiber 101. In this case, a discrete amplifier 103 and a pump unit 104 are provided in a repeater unit on one side (output side) of the transmission fiber 101 and coupled to the transmission fiber 101 through an optical coupler 102. The pump unit 104 comprises a plurality of pump lasers of different wavelengths.

Fig. 3 shows co-directional pumping, where the pump light 113 propagates in the same direction as the signal light 111. In this case, a pump unit 106 is provided in a repeater unit on the other side (input side) of the transmission fiber 101 and coupled to the transmission fiber 101 through an optical coupler 105.

In state-of-the art systems, counter-propagation is commonly used in order to avoid the risk of pump-signal crosstalk.

Employing a plurality of pumps with different wavelengths and suitable power allows flattening the gain over a wide signal wavelength range as required in broadband WDM transmission systems (see Reference 1).

## Reference 1

L. Labrunie et al., "1.6 Terabit/s (160×10.66 Gbit/s) unrepeated transmission over 321 km using second order pumping distributed Raman amplification", OAA 2001 PD3.

5

Fig. 4 shows this principle schematically with a power spectrum for a C/L-band transmission system with four Raman pumps of different wavelengths (first-order multiple-wavelength Raman pumping). Pump light of 10 frequencies  $f_1, f_2, f_3$ , and  $f_4$  ( $f_1 > f_2 > f_3 > f_4$ ) amplifies L-band and C-band signal waves with an appropriate gain over the signal wavelength range.

Since the Raman pumping efficiency is polarization sensitive it is necessary to use depolarized pump light 15 in order to suppress polarization dependent gain. Depolarization can be achieved by multiplexing two waves with orthogonal polarization of the same or of slightly different frequencies  $f_{p1}, f_{p2}$  given by  $f_{p1} = f_p - \delta f_p$ ,  $f_{p2} = f_p + \delta f_p$ , where  $\delta f_p$  is up to 0.35 THz. Later on, the term 20 "pump" will be used for such pairs of multiplexed waves with slightly different frequencies and orthogonal polarization. As frequency of a depolarized pump the center frequency  $f_p$  is used.

The group velocity  $v_g$ , i.e. the speed at which an 25 optical pulse propagates through a fiber, is wavelength

dependent. This phenomenon is known as group velocity dispersion or chromatic dispersion. Fig. 5 shows schematically the wavelength dependence of the group velocity of a standard single mode fiber (SMF). In the normal dispersion regime, the higher frequency components travel slower than the lower frequency components ( $\lambda < \lambda_d$ ,  $\beta_2 > 0$ ). Group velocity dispersion parameter  $\beta_2$  is written as follows by using wavelength  $\lambda$  ( $\omega = 2\pi/\lambda$ ) and dispersion parameter D.

$$\beta_2 = \frac{d}{d\omega} \left( \frac{1}{v_g} \right) = - \frac{\lambda^2}{2\pi c} D \quad (1)$$

Chromatic dispersion causes pulse broadening because the individual spectral components of the pulse propagate at different speeds.

Recently, two new technologies have been introduced to further improve the performance of Raman amplified transmission systems: second- and third-order Raman pumping and Raman pump modulation.

Second order Raman pumping uses a second order pump to amplify first order pumps along the transmission fiber. This makes the gain experienced by the signals more uniform along the fiber, which improves the noise figure. It has first been proposed with the first-order pump counter-propagating and the second-order pump co-propagating to the signals (see Reference 2).

## Reference 2

K. Rotwitt et al., "Transparent 80 km bi-directionally pumped distributed Raman amplifier with second order  
5 pumping", European conference on optical communications 1999, vol. II, pp. 144-145.

Later, second-order Raman pumping with both the first- and second-order pumps counter-propagating to  
10 the signals has been demonstrated (see References 1 and 3).

## Reference 3

Y. Hadjar et al., "Quantitative analysis of second order  
15 distributed Raman amplification", OFC 2002 ThB pp. 381-382.

Third-order Raman pumping has also been demonstrated (see Reference 4).  
20

## Reference 4

S. B. Papernyi et al., "Third-order cascaded Raman amplification", OFC 2002 postdeadline papers, FB4.  
25

Fludger et al. proposed modulation and temporal

separation of multi-wavelength Raman pumps as a means to suppress stimulated Raman scattering and four-wave mixing (FWM) among pumps (see Reference 5). Both effects degrade the performance of broadband WDM transmission systems.

#### Reference 5

C. R. S. Fludger et al., "Novel ultra-broadband high performance distributed Raman amplifier employing pump modulation", OFC 2002 WB4.

As Fludger et al. have pointed out, the modulation frequency of the Raman pump light should be in the order of a few 10 MHz to several 100 MHz. If the modulation frequency is too low, modulation transfer from the pumps to the signals occurs. On the other hand, if it is too high, the pump pulses are dispersed.

Since the Raman effect is practically instantaneous when compared to signal bit rates, modulation of the pump intensity will cause variations in the gain experienced by the signals. However, in counter-directional pumping scheme, the gain is averaged over the effective length of the transmission fiber such that any pump fluctuations above a few KHz are filtered. Further, modulation transfer from the pumps to the

signals is negligible for the modulation frequency greater than a few MHz (see References 5 and 6).

#### Reference 6

- 5 C. R. S. Fludger et al., "Pump to signal RIN transfer in Raman fiber amplifiers", Journal of lightwave technology, Vol. 19, No. 8, pp. 1140-1148, August 2001.

#### Disclosure of Invention

10 It is an object of the present invention to provide an amplification system that allows further freedom in the control of the lateral signal power distribution (gain distribution) along the fiber.

The amplification system according to the present  
15 invention employs Raman amplification with a plurality of first-order Raman pumps and at least one second-order Raman pump which amplifies the first-order Raman pumps. The first- and second-order pumps counter-propagate to signal light in an optical fiber. The amplification  
20 system comprises a plurality of light sources and a modulator unit.

In the first aspect of the present invention, the light sources generate pump light of the first- and second-order pumps. The modulator unit modulates the  
25 pump light of the first- and second-order pumps by using



relative timing of the first- and second-order pumps to optimize lateral signal power distribution along the optical fiber.

In the second aspect of the present invention, the  
5 light sources generate pump light of the first- and second-order pumps. The modulator unit modulates the pump light of the first- and second-order pumps by using relative timing of the first- and second-order pumps to allow flattening lateral signal power distribution  
10 along the optical fiber.

In the third aspect of the present invention, the light sources generate pump light of the first- and second-order pumps. The modulator unit modulates the pump light of the first- and second-order pumps by  
15 controlling a length of an interaction area in the optical fiber. In the interaction area pump power of modulated pulses of the second-order pump overlap with pump power of modulated pulses of the first-order pumps.

## 20 Brief Description of Drawings

Fig. 1 shows a Raman gain profile.

Fig. 2 shows counter-directional pumping.

Fig. 3 shows co-directional pumping.

Fig. 4 shows principle of first-order  
25 multiple-wavelength Raman pumping.

Fig. 5 shows group velocity dispersion in a standard single mode fiber.

Fig. 6 shows the configuration of modulated first- and second-order Raman pumping.

5 Fig. 7 shows the power spectrum of modulated first- and second-order Raman pumping.

Fig. 8 shows modulation of first- and second-order Raman pumps.

10 Fig. 9 shows impact of modulated second-order Raman pumping.

Fig. 10 shows relationship among pulse parameters of pump i.

Fig. 11 shows the condition of the maximum temporal offset between pump 1 and 2.

15 Fig. 12 shows relationship between the first- and second-order pump pulses at the starting point of overlap.

Fig. 13 shows relationship between the first- and second-order pump pulses at the ending point of overlap.

20 Fig. 14 shows the configuration of a pump unit employing electrical modulation.

Fig. 15 shows the configuration of a pump unit employing optical modulation.

25 Fig. 16 shows a pumping concept with reverse third-order pumping.

Fig. 17 shows a pumping concept with forward third-order pumping.

Fig. 18 shows pump pulse shapes for equalizing gain transfer from the second-order pump to the first-order  
5 pump.

Fig. 19 shows pump pulse shapes in the interaction area.

#### Best Mode for Carrying Out the Invention

10 Hereinafter, preferred embodiments according to the present invention will be described in detail by referring to the drawings.

In the preferred embodiments the techniques of second-order Raman pumping and pump modulation are  
15 combined. First- and second-order Raman pumps are both modulated and launched in opposite direction to the signals. Temporal offsetting of the first- and second-order Raman pumps prevents an interaction between the pumps close to the fiber end, where the launch power  
20 of the first-order Raman pumps is still high.

Fig. 6 illustrates this concept for a C/L-band transmission system. The pump light 202 launched by the pump unit 201 comprises four first-order Raman pumps and one second-order Raman pump. The power spectrum of  
25 this system is as shown in Fig. 7. The first-order Raman

pumps with frequencies  $f_2$ ,  $f_3$ ,  $f_4$ , and  $f_5$  provide gain to the signal channels and the second-order Raman pump with frequency  $f_1$  pumps the first order Raman pumps.

The first-order Raman pumps are modulated in phase  
5 with a rectangular pulse as shown in Fig. 8, whereas the pulse train of the second-order pump is out of phase. The horizontal axis in Fig. 8 represents time and the height of each pulse represents power of the modulated pump. The temporal offset of a second-order pump pulse  
10 to a first-order pump pulse is determined such that they do not or partially overlap.

As the pumps penetrate deeper into the fiber, their power reduces due to absorption. However, because of the different group velocities the modulated first- and  
15 second-order pump pulses increasingly overlap resulting in a power transfer from the second- to the first-order pump and as a consequence, a higher gain experienced by the signal farther away from the fiber end (launching point of the pumps).

20 This amplification scheme can be represented by the words "remote amplification". "Remote amplification" of the first- and second-order pumps means that the overlap between the pumps reaches its maximum deeper in the fiber, thus pushing the power transfer  
25 from the second- to first-order pump deeper into the

fiber. This effect is illustrated in Fig. 9.

In Fig. 9, the second-order pump propagates faster than the first-order pumps. However, depending on the fiber type and the pump wavelength allocation, the opposite might be the case. The vertical axis represents power and the horizontal axis represents a distance from another fiber end (the launching point of signals) along the fiber.

The solid lines 211 and 212 indicate the power distribution of a signal and a first-order pump, respectively, without second-order pumping. The dashed lines 213 and 214 schematically show the impact of pulsed second-order pumping on the power distribution of the signal and the first-order pump, respectively. Interaction area 215 represents an area where the first- and second-order pump pulses overlap and an interaction occurs between the first- and second-order pumps.

In the case that the second-order pumping is utilized, the launch power of the first-order pump is reduced such that the resulting gain of the signals remains constant. The gain is shifted deeper into the fiber such that the signals do not drop to such low power levels as in the conventional pumping scheme, which increases the optical-signal to noise ratio.

Next, the relationship between the first- and

second-order pump pulses is discussed. For ease of explanation, a first-order pump and the second-order pump are represented by pump 1 and 2, respectively and some parameters are introduced as follows.

5  $T_{on,i}$ : time in which pump  $i$  is on during one cycle

$T_{off,i}$ : time in which pump  $i$  is off during one cycle

$T_i = T_{on,i} + T_{off,i}$

$1/T_i$ : modulation frequency of pump  $i$

$\Gamma_i = T_{on,i}/T_i$ : duty cycle of pump  $i$

10  $T_{offset,ij}$ : temporal offset between pump  $i$  and  $j$

$v_{gr,i}$ : group velocity of pump  $i$

$D = d(1/v_{gr})/d\lambda$ : group velocity dispersion ( $D=17$  ps/nm/km for SMF)

The relationship among the parameters  $T_i$ ,  $T_{on,i}$  and  
 15  $T_{off,i}$  is illustrated in Fig. 10. If the pulse cycle  $T_2$  of pump 2 is set to match the pulse cycle  $T_1$  of pump 1 and the cycle is represented by  $T$ , the maximum temporal offset between the pumps is written as follows.

$$T_{offset,12} = T - T_{on,2} = (1 - \Gamma_2) T \quad (2)$$

20 This condition of the maximum temporal offset is shown in Fig. 11. The gap  $\Delta t$  between the falling edge of the pump 1 pulse and the rising edge of the following pump 2 pulse is obtained as follows.

$$\Delta t = T_{offset,12} - T_{on,1} = (1 - \Gamma_1 - \Gamma_2) T \quad (3)$$

25 In a first approximation, the group velocities of

the pumps are represented by the following expressions with  $\lambda_0$ ,  $\lambda_1$  and  $\lambda_2$  as a reference wavelength, the wavelength of pump 1 and the wavelength of pump 2, respectively.

$$v_{gr,1} = 1 / (1/v_{gr,0} + D(\lambda_1 - \lambda_0)) \quad (4)$$

$$5 \quad v_{gr,2} = 1 / (1/v_{gr,0} + D(\lambda_2 - \lambda_0)) \quad (5)$$

In equations (4) and (5),  $v_{gr,0}$  represents the group velocity of the light with the reference wavelength  $\lambda_0$ . The difference of propagation time from the launching point  $P_L$  of the pumps to a position  $P_z$  along the fiber is obtained as follows, provided that  $L$  and  $z$  represent distances from the launching point of signals to the point  $P_L$  and the position  $P_z$ , respectively.

$$(L-z)/v_{gr,1} - (L-z)/v_{gr,2} = (L-z)D(\lambda_1 - \lambda_2) \quad (6)$$

In order to have the overlap of pulses shown in Fig. 11 start at  $P_z$ ,  $\Delta t$  has to match the difference of propagation time. From equations (3) and (6), the following equation is obtained.

$$(L-z)D(\lambda_1 - \lambda_2) = (1 - \Gamma_1 - \Gamma_2)T \quad (7)$$

This is rewritten as the following condition for the starting position  $P_z$  with  $\kappa = T/(D(\lambda_1 - \lambda_2))$

$$L-z = \kappa(1 - \Gamma_1 - \Gamma_2) \quad (8)$$

The interaction time is defined as a time from the start to end of the overlap. The relationship between the first- and second-order pump pulses at the starting and ending points of the overlap is shown in Figs. 12

and 13, respectively. As is clear from Fig. 13, the interaction time is represented by the following expression.

$$T_{on,1} + T_{on,2} = (\Gamma_1 + \Gamma_2) T \quad (9)$$

5 On the other hand, the interaction time is written by using the interaction length. The interaction length is the distance between the starting and ending points of the overlap and corresponds to the length of the interaction area 215 in Fig. 9. The interaction time  
10 is rewritten as follows with  $\Delta z$  as the interaction length.

$$\Delta z / v_{gr,1} - \Delta z / v_{gr,2} = \Delta z D (\lambda_1 - \lambda_2) \quad (10)$$

Assuming that the right side of equation (9) equals the right side of equation (10),  $\Delta z$  is represented by the following expression.

$$15 \quad \Delta z = (\Gamma_1 + \Gamma_2) T / (D (\lambda_1 - \lambda_2)) = \kappa (\Gamma_1 + \Gamma_2) \quad (11)$$

From equation (11), it is verified that the interaction length can be controlled by adjusting the modulation frequency ( $1/T$ ) and duty cycles ( $\Gamma_1$  and  $\Gamma_2$ ). An optimum overall performance of the system, such as  
20 flattening gain distribution along the fiber, is achieved by choosing an appropriate interaction length and starting position of the interaction by adjusting the temporal offset between the first- and second-order pumps.

25 Further, two or more second-order pumps with



arbitrary temporal offsets can be used. Therefore, the modulation frequency, the duty cycles and the temporal offsets of first- and second-order Raman pumps can be adjusted in order to achieve an interaction area for an optimum overall performance. Compared to continuous wave second-order pumping this method adds freedom in adjusting the signal power distribution along the fiber.

The pump sources are modulated either directly (electrically) through the driving current or optically using an electro-optical modulator.

Fig. 14 shows the configuration of a pump unit employing electrical modulation. The pump unit shown in Fig. 14 comprises laser driver electronics 221, laser diodes (light sources) 222 and 223 and a multiplexer 224. The laser driver electronics 221 supplies modulated current power to the laser diodes 222 and 223.

The laser diodes 222 generate pump lights with wavelengths  $\lambda_1$  through  $\lambda_n$  by the modulated current for  $n$  first-order pumps. The laser diodes 223 generate pump lights with wavelengths  $\lambda_{n+1}$  through  $\lambda_{n+m}$  by the modulated current for  $m$  second-order pumps. The laser driver electronics 221 operates as a modulator unit and controls the relative timing of the first- and second-order pumps.

The multiplexer 223 multiplexes and outputs the pump lights from the laser diodes 222 and 223. The pulse

trains 225 and 226 represent typical pulse shapes of the first- and second-order pumps, respectively.

Fig. 15 shows the configuration of a pump unit employing optical modulation. The pump unit shown in Fig. 15 comprises modulator driver electronics 231, laser diodes 232 and 233, optical modulators 234 and 235 and a multiplexer 236. The modulator driver electronics 231 supplies power to the optical modulators 234 and 235. The laser diodes 232 generate lights with wavelengths  $\lambda_1$  through  $\lambda_n$  and the laser diodes 233 generate lights with wavelengths  $\lambda_{n+1}$  through  $\lambda_{n+m}$ .

The optical modulators 234 modulate the lights from the laser diodes 232 to generate pump lights of n first-order pumps. The optical modulators 235 modulate the lights from the laser diodes 233 to generate pump lights of m second-order pumps. The modulator driver electronics 231 and the optical modulators 234 and 235 operate as a modulator unit and control the relative timing of the first- and second-order pumps.

The multiplexer 236 multiplexes and outputs the pump lights from the optical modulators 234 and 235. The pulse trains 237 and 238 represent typical pulse shapes of the first- and second-order pumps, respectively.

In the configurations shown in Figs. 14 and 15,

the modulation frequency ranges from a few MHz to several hundred MHz, depending on the difference of the group velocities of the first- and second-order pumps, and the desired interaction length.

5           In addition, a continuous wave third-order pump light can be launched either in forward or in backward direction to compensate for absorption losses of the second-order pumps. The third-order pumping is employed to amplify the second-order pump light.

10           In contrast to modulated first- and second-order reverse pumping without third-order pumping, which is shown in Fig. 6, Figs. 16 and 17 show pumping concepts with reverse third-order pumping and with forward third-order pumping, respectively. The pump unit 241  
15 in Fig. 16 generates the first-, second- and third-order pump light propagating in opposite direction to the signal light 111, whereas the pump unit 242 in Fig. 17 generates only the third-order pump light propagating in the same direction as the signal light 111.

20           The pump unit 241 can be realized, for example, by adding a laser diode for the continuous wave third-order pump to one of the configurations shown in Figs. 14 and 15. The pump unit 242 also includes such a laser diode.

25           According to the third-order pumping scheme, the

absorption loss experienced by the second-order pump is partly compensated by the amplification through the third-order pump. Thus, during the interaction between the second- and first-order pump pulses, the gain  
5 experienced by the first-order pump is larger. As a consequence, the signals also experience stronger gain in the interaction area.

Furthermore, the second-order pump light might be modulated such that the components overlapping with the  
10 first-order pumps deeper within the fiber have a higher launch power. In this case, temporal shapes of the first- and second-order pump pulses are controlled as the relative timing of the pumps. This technique can further help to equalize the gain induced by the first-order  
15 pumps along the fiber.

Fig. 18 shows an example of the second-order pump pulse shape in such a modulation concept. The pulse trains 251 and 252 represent typical pulse shapes of the first- and second-order pumps, respectively, at the launching  
20 point of the pumps ( $t=0$ ). In the interaction area ( $t=t_1$ ,  $t_1>0$ ), the pulse shapes change as shown in Fig. 19 due to the power absorption within the fiber.

If the pulse train 252 in Fig. 18 is used instead of the pulse train 226 in Fig. 14 or the pulse train  
25 238 in Fig. 15, since the power of the second-order pump

light increases from the starting point towards the ending point of the interaction area, the power transfer from the second- to the first-order pump is pushed deeper into the fiber.

5           The concept of the present invention can be applied not only to distributed Raman amplification but also to discrete fiber Raman amplifiers (e.g. Raman pumped dispersion compensating fibers or S-band fiber Raman amplifiers).

10

## CLAIMS

1. An amplification system employing Raman amplification with a plurality of first-order Raman pumps and at least one second-order Raman pump which amplifies the first-order Raman pumps, the first- and second-order pumps counter-propagating to signal light in an optical fiber, the amplification system comprising:  
a plurality of light sources generating pump light of the first- and second-order pumps; and  
a modulator unit modulating the pump light of the first- and second-order pumps by using relative timing of the first- and second-order pumps to optimize lateral signal power distribution along the optical fiber.
- 15
2. An amplification system employing Raman amplification with a plurality of first-order Raman pumps and at least one second-order Raman pump which amplifies the first-order Raman pumps, the first- and second-order Raman pumps counter-propagating to signal light in an optical fiber, the amplification system comprising:  
a plurality of light sources generating pump light of the first- and second-order pumps; and  
a modulator unit modulating the pump light of the first- and second-order pumps by using relative timing
- 20
- 25

of the first- and second-order pumps to allow flattening lateral signal power distribution along the optical fiber.

5     3.     The amplification system according to claim 2, further comprising a light source generating pump light of at least one third-order pump co-propagating with the signal light to amplify the second-order pump.

10    4.     The amplification system according to claim 2, further comprising a light source generating pump light of at least one third-order pump co-propagating with the second-order pump to amplify the second-order pump.

15    5.     The amplification system according to claim 2, wherein the modulator unit controls a temporal shape of modulated pulses of the second-order pump such that pump power of the modulated pulses of the second-order pump overlap with pump power of modulated pulses of the  
20    first-order pumps.

6.     The amplification system according to claim 5, wherein the modulator unit controls the temporal shape of the pulses such that power transfer from the  
25    second-order pump to the first-order pumps is pushed

deeper into the optical fiber.

7. The amplification system according to claim 2,  
wherein the modulator unit includes driver electronics  
5 controlling the relative timing and electrically  
modulates the pump light of the first- and second-order  
pumps through the driver electronics.

8. The amplification system according to claim 2,  
10 wherein the modulator unit includes optical modulators  
controlling the relative timing and optically modulates  
the pump light of the first- and second-order pumps  
through the optical modulators.

15 9. The amplification system according to claim 2,  
wherein the modulator unit controls the relative timing  
by adjusting at least one of a modulation frequency,  
duty cycles and temporal offsets of pulses of the first-  
and second-order pumps.

20 10. An amplification system employing Raman  
amplification with a plurality of first-order Raman pumps  
and at least one second-order Raman pump which amplifies  
the first-order Raman pumps, the first- and second-order  
25 pumps counter-propagating to signal light in an optical



fiber, the amplification system comprising:

a plurality of light sources generating pump light  
of the first- and second-order pumps; and

a modulator unit modulating the pump light of the  
5 first- and second-order pumps by controlling a length  
of an interaction area in the optical fiber, in which  
pump power of modulated pulses of the second-order pump  
overlap with pump power of modulated pulses of the  
first-order pumps.

10

11. The amplification system according to claim 10,  
wherein the modulator unit controls the length of the  
interaction area by adjusting at least one of a modulation  
frequency, duty cycles and temporal offsets of pulses  
15 of the first- and second-order pumps.

12. An amplification method employing Raman  
amplification with a plurality of first-order Raman pumps  
and at least one second-order Raman pump which amplifies  
20 the first-order Raman pumps, the first- and second-order  
pumps counter-propagating to signal light in an optical  
fiber, the amplification method comprising:

generating pump light of the first- and  
second-order pumps;

25 modulating the pump light of the first- and

second-order pumps by using relative timing of the first- and second-order pumps to optimize lateral signal power distribution along the optical fiber; and

launching the first- and second-order pumps in  
5 opposite direction to the signal light in the optical fiber.

13. An amplification method employing Raman  
amplification with a plurality of first-order Raman pumps  
10 and at least one second-order Raman pump which amplifies  
the first-order Raman pumps, the first- and second-order  
Raman pumps counter-propagating to signal light in an  
optical fiber, the amplification method comprising:

generating pump light of the first- and  
15 second-order pumps;

modulating the pump light of the first- and  
second-order pumps by using relative timing of the first-  
and second-order pumps to allow flattening lateral signal  
power distribution along the optical fiber; and

20 launching the first- and second-order pumps in  
opposite direction to the signal light in the optical  
fiber.

14. An amplification method employing Raman  
25 amplification with a plurality of first-order Raman pumps

and at least one second-order Raman pump which amplifies the first-order Raman pumps, the first- and second-order pumps counter-propagating to signal light in an optical fiber, the amplification method comprising:

5       generating pump light of the first- and second-order pumps;

          modulating the pump light of the first- and second-order pumps by controlling a length of an interaction area in the optical fiber, in which pump  
10       power of modulated pulses of the second-order pump overlap with pump power of modulated pulses of the first-order pumps; and

          launching the first- and second-order pumps in opposite direction to the signal light in the optical  
15       fiber.

1 / 19

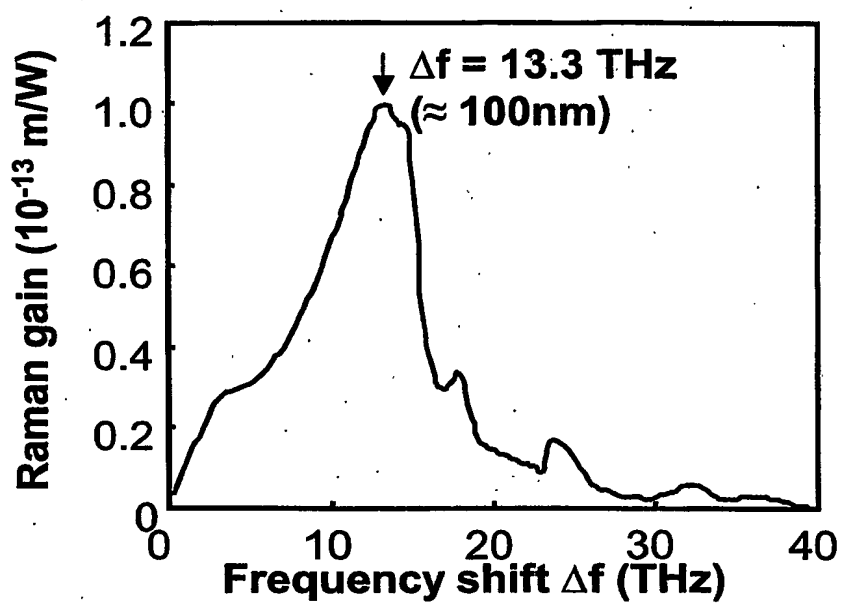


FIG. 1

2 / 19

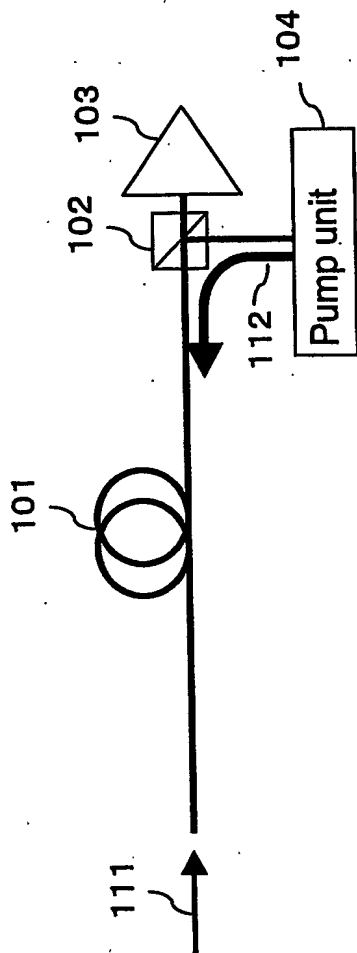


FIG. 2

3 / 1 9

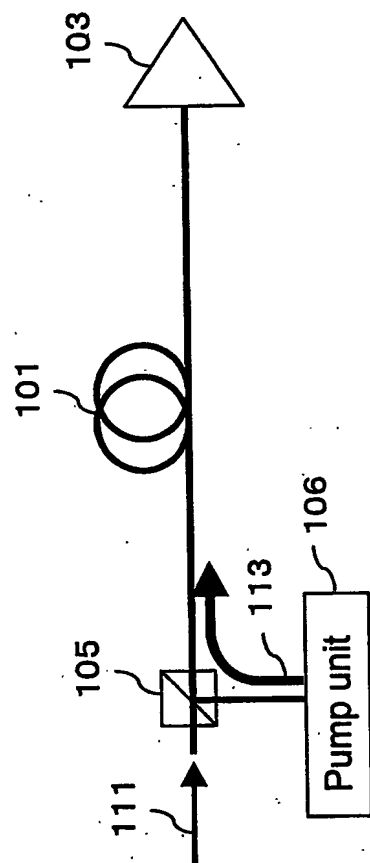


FIG. 3

4 / 1 9

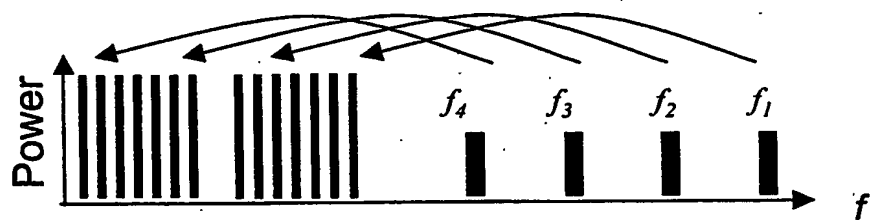


FIG. 4

5 / 19


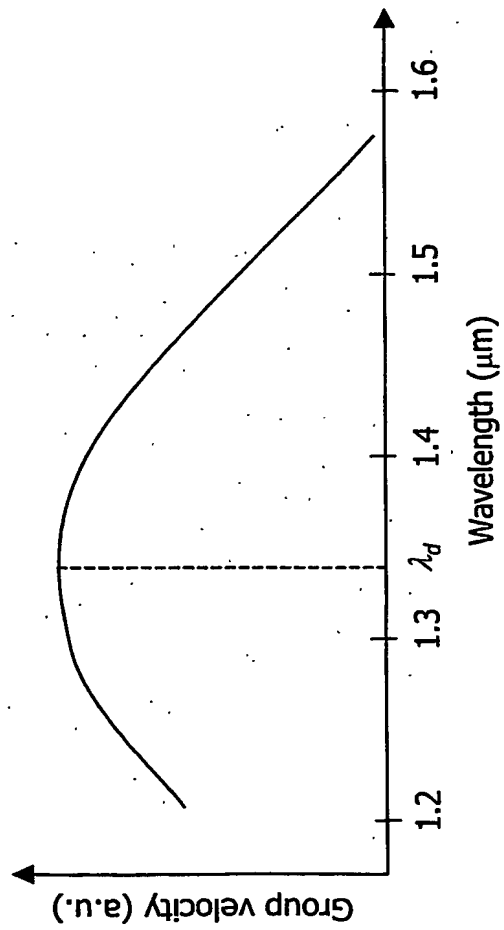


FIG. 5




6 / 1 9

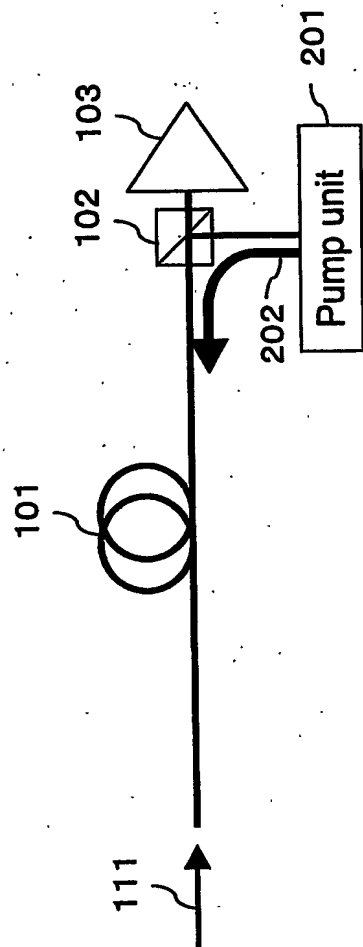

F I G. 6

7 / 1 9

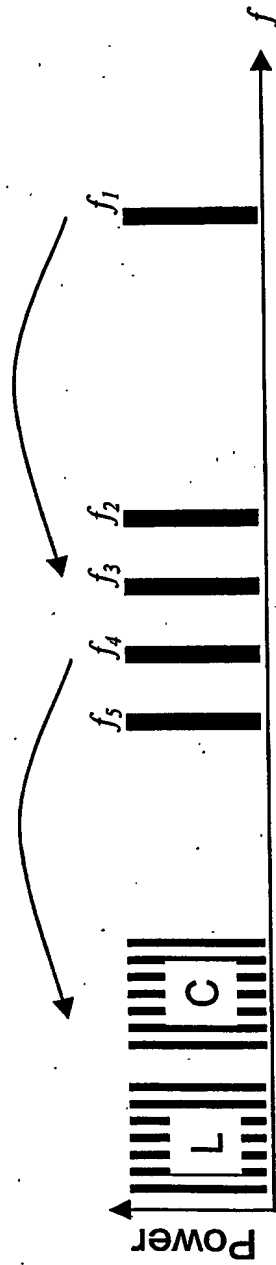

F I G. 7

8 / 19

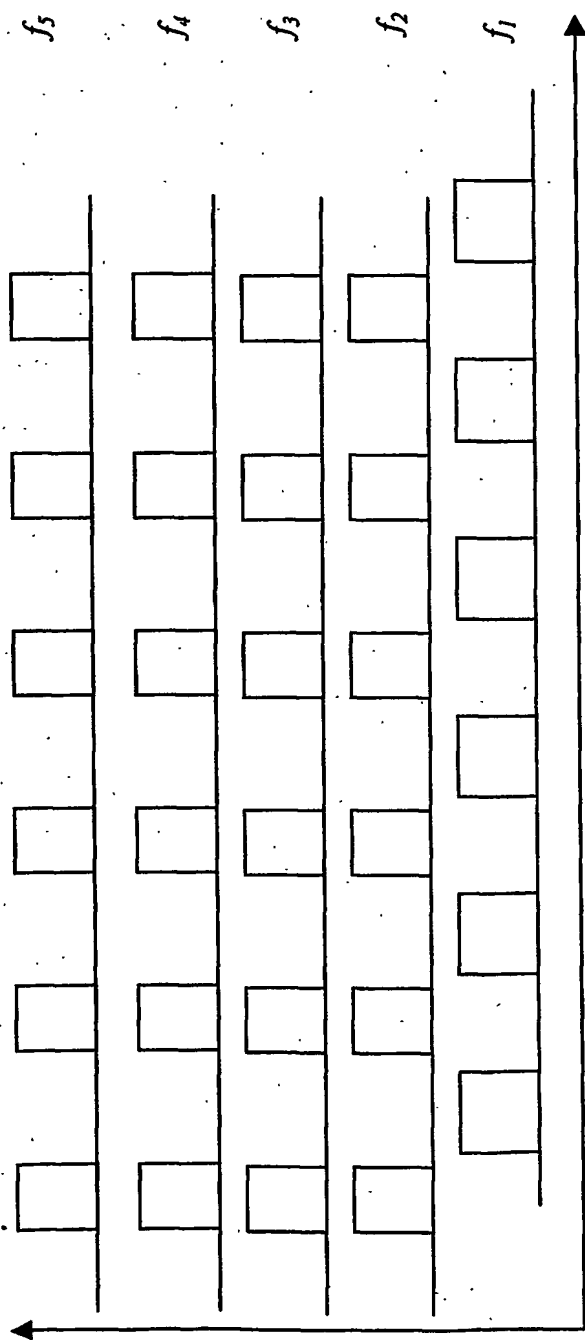


FIG. 8

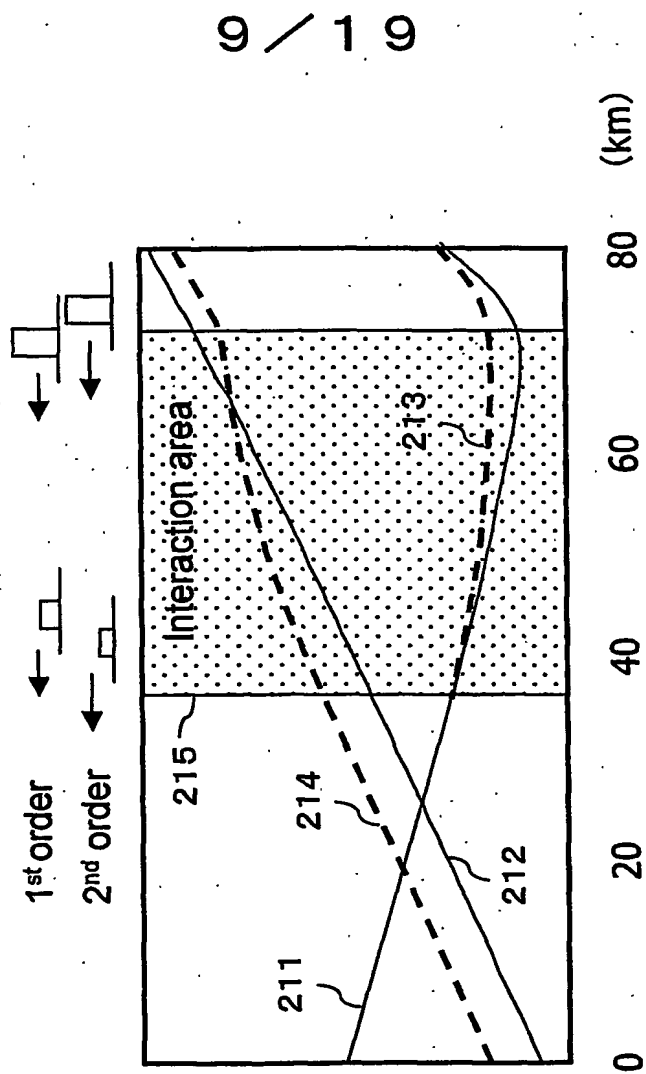


FIG. 9

10/19

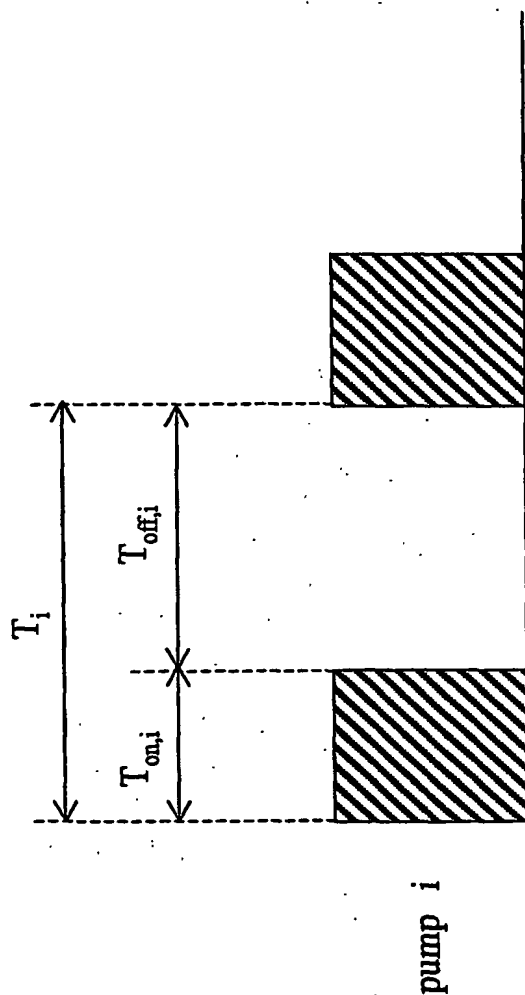


FIG. 10

11 / 19


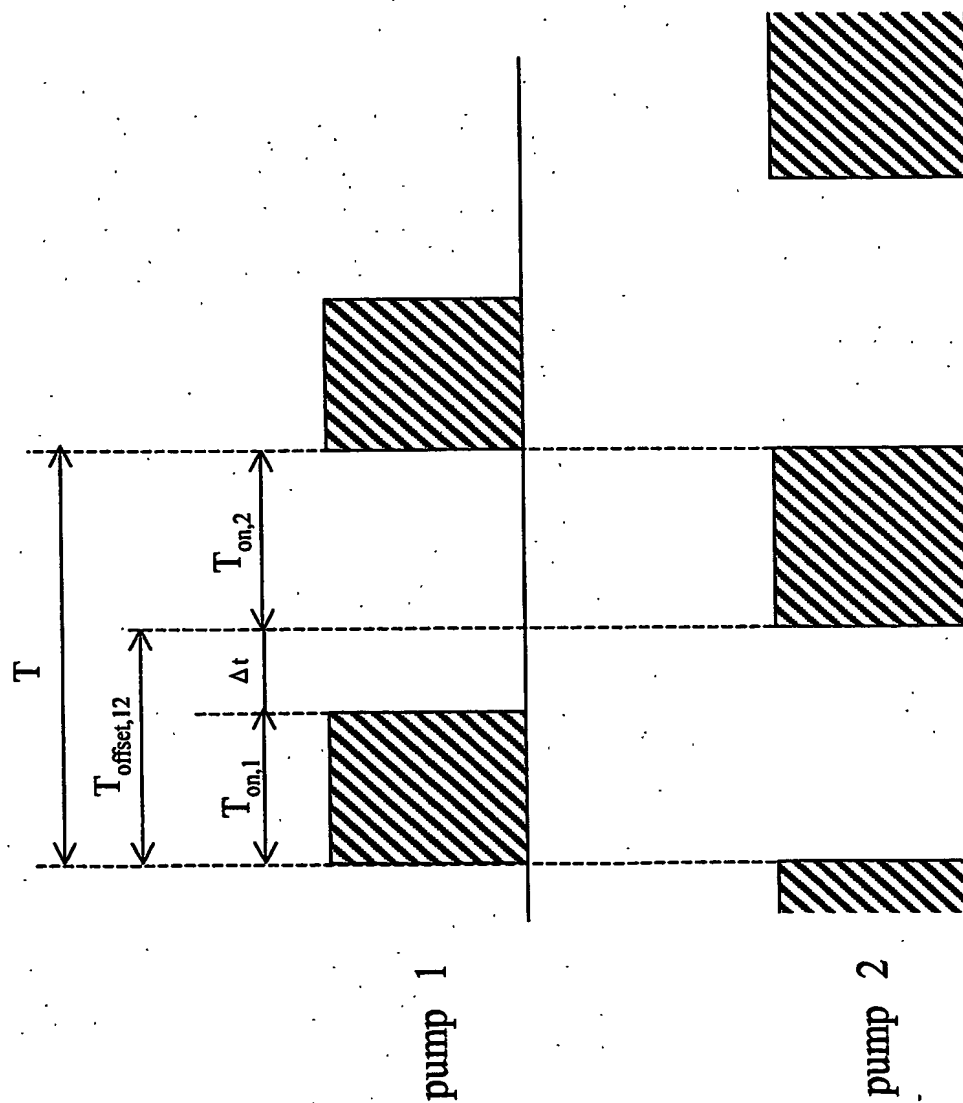


FIG. 11

1 2 / 1 9

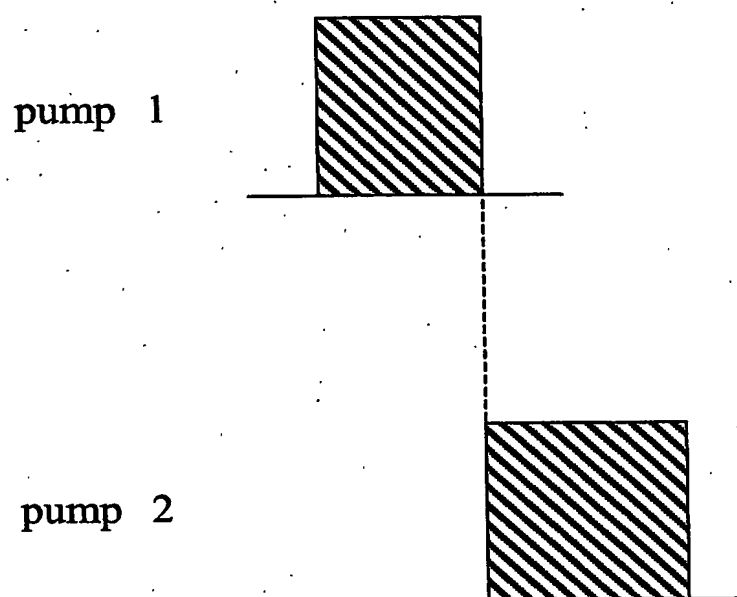

F I G . 1 2

13/19

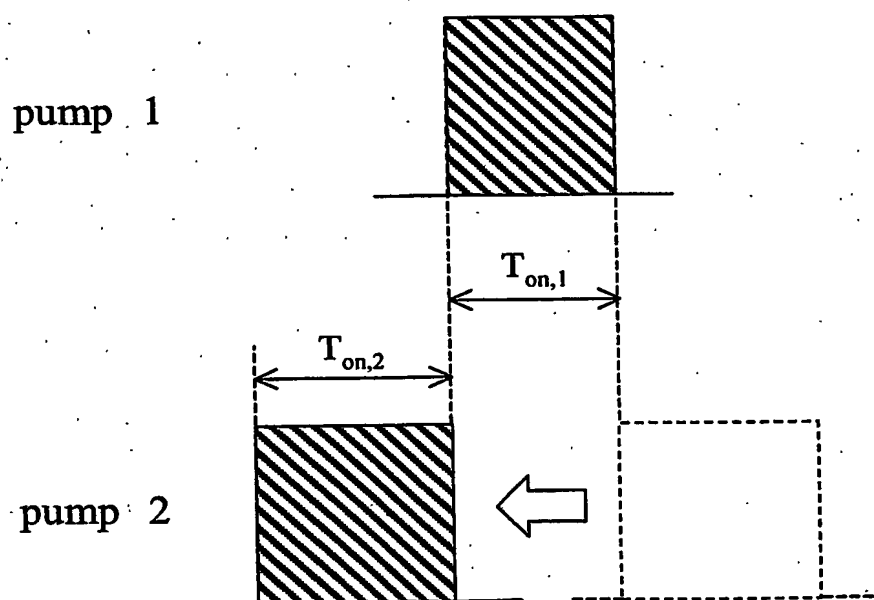


FIG. 13



1 4 / 1 9

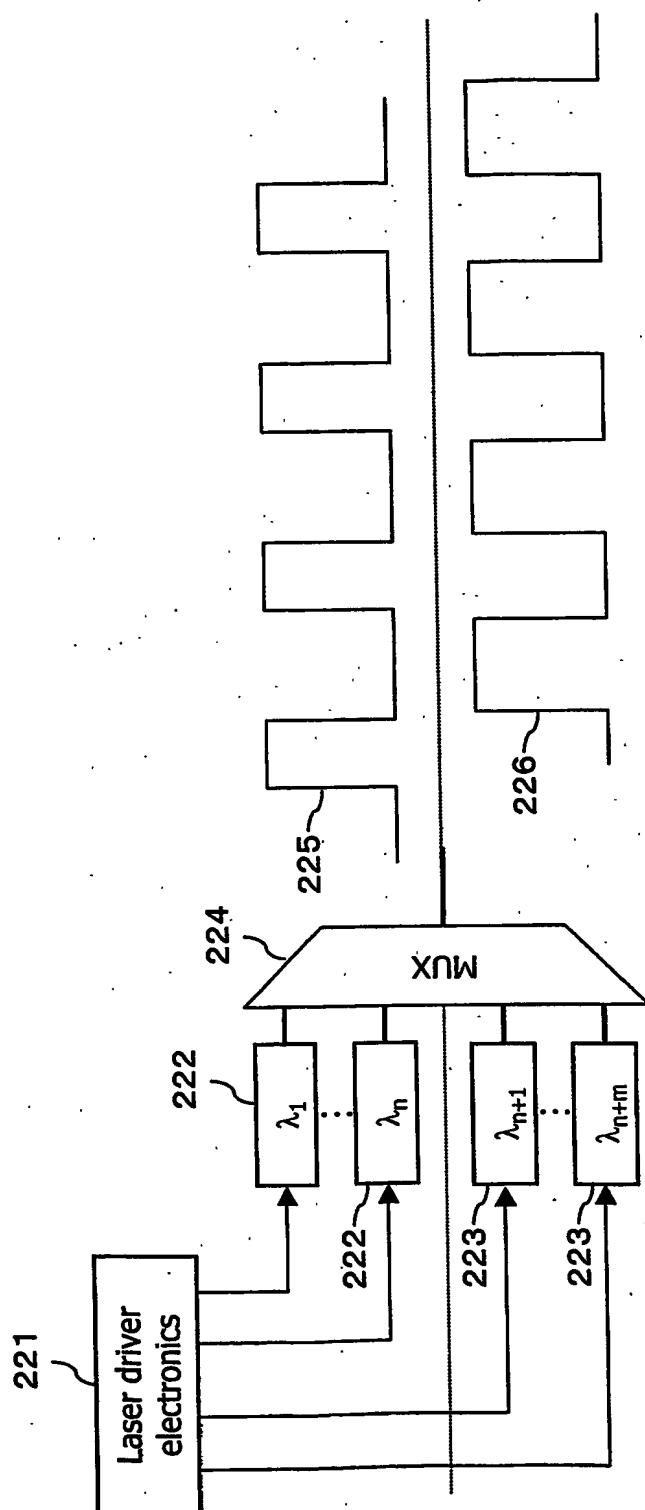


FIG. 14

15 / 19

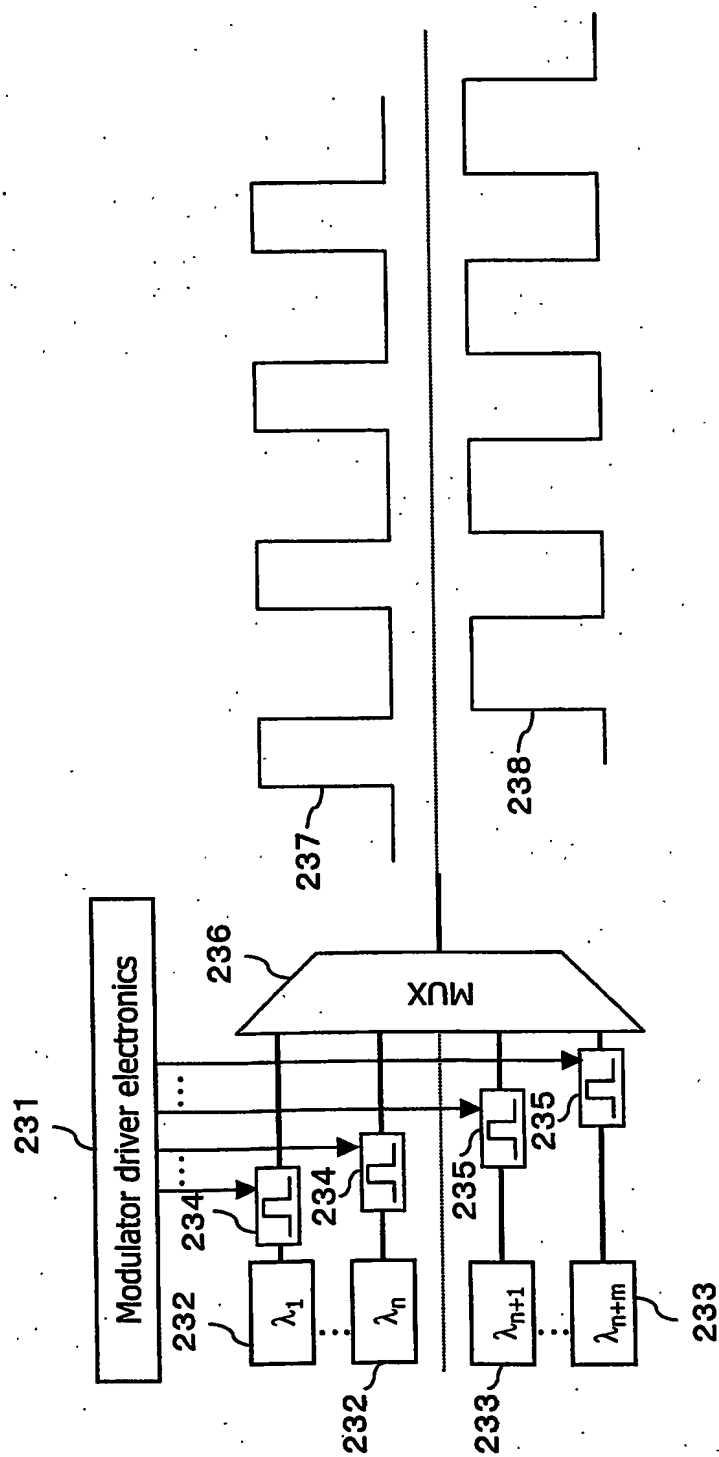


FIG. 15

16 / 19

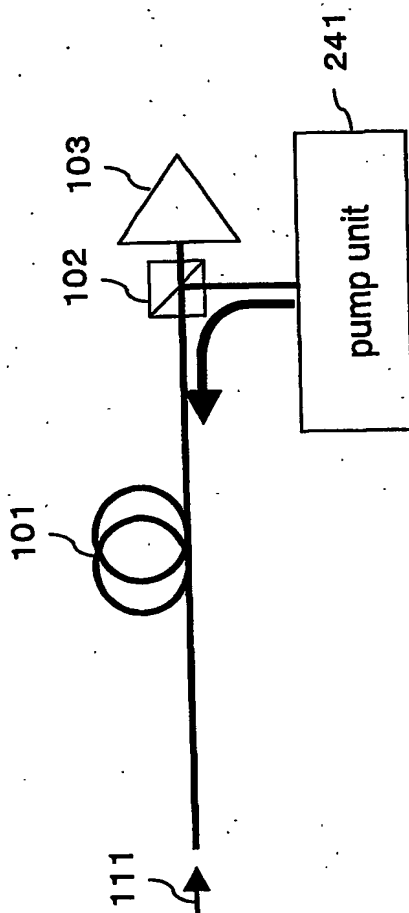


FIG. 16

17 / 19

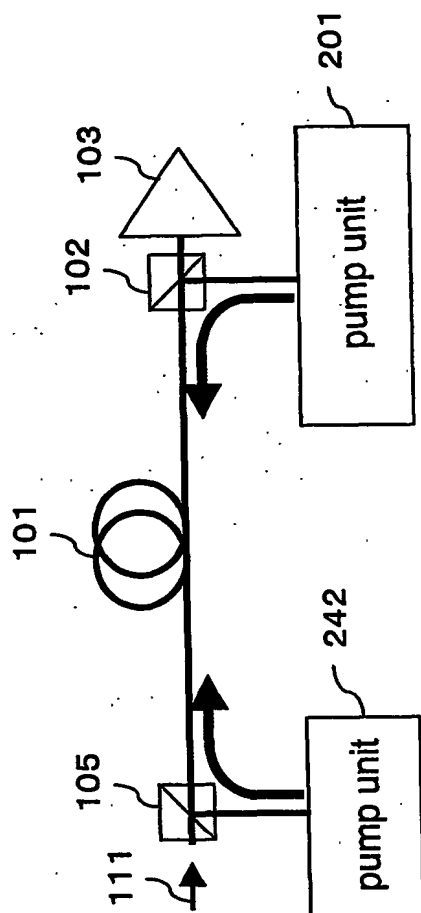


FIG. 17

18 / 19

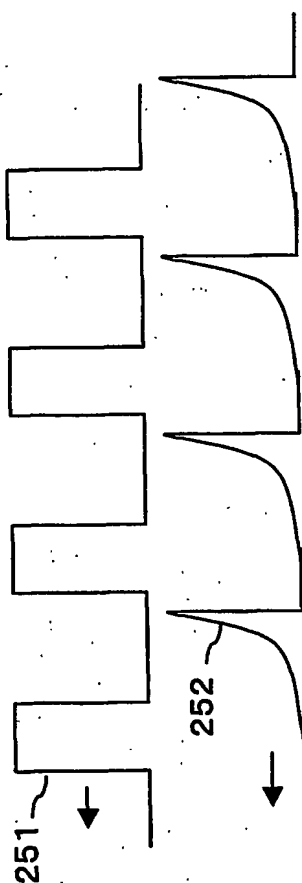


FIG. 18

19/19

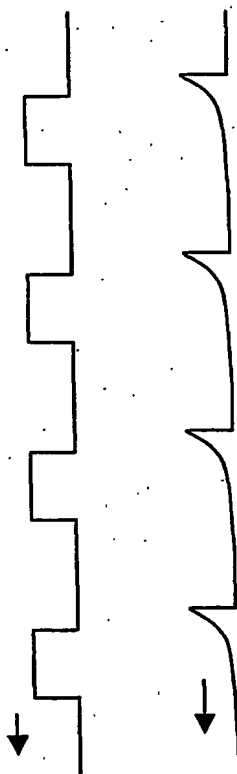


FIG. 19

## INTERNATIONAL SEARCH REPORT

onal Application No  
PCT/JP 02/10375

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04B10/17 H01S3/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04B H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 022 870 A (LUCENT TECHNOLOGIES INC) 26 July 2000 (2000-07-26) column 5, line 15 - line 25 column 5, line 47 - column 6, line 6 column 6, line 48 - column 7, line 11 figures 2,5-7,9	1-4,7-14
A	---	5,6
Y	EP 1 148 666 A (LUCENT TECHNOLOGIES INC) 24 October 2001 (2001-10-24) page 2, line 28 - line 43 page 3, line 7 - line 34 page 3, line 57 - page 4, line 8 page 4, line 20 - page 5, line 28 claims 1-6 figures 4-6,8	1-4,7-14
A	---	5,6
	--- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

\*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the International search

14 April 2003

Date of mailing of the International search report

22/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vaquero, R

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/JP 02/10375

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	EP 1 298 766 A (NORTEL NETWORKS LTD) 2 April 2003 (2003-04-02) page 2, line 15 - line 20 page 3, line 26 - line 29 page 2, line 37 - line 45 page 3, line 1 - line 14 page 3, line 44 - page 4, line 19 page 5, line 35 - line 50 page 6, line 9 - line 39 claims 1,2 figures 1,2,5 -----	1-14



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/JP 02/10375

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1022870	A	26-07-2000	US 6163636 A EP 1022870 A2 JP 2000214503 A	19-12-2000 26-07-2000 04-08-2000
EP 1148666	A	24-10-2001	CA 2339756 A1 EP 1148666 A2 JP 2002006349 A	20-10-2001 24-10-2001 09-01-2002
EP 1298766	A	02-04-2003	EP 1298766 A1	02-04-2003